


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XRCOLOR
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
CONTACT BLADE: GOLD PLATED BeCu.
SPRING: STAINLESS STEEL.
2. P/N: 9207COLOR
HOUSING: MOLDED PHENOLIC PLASTIC. AVAILABLE IN BLACK AND RED.
FRAME: NICKEL PLATED BRASS.
HARDWARE: STAINLESS STEEL NUT AND SCREW.

3. P/N: W-600/COLOR
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
4. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

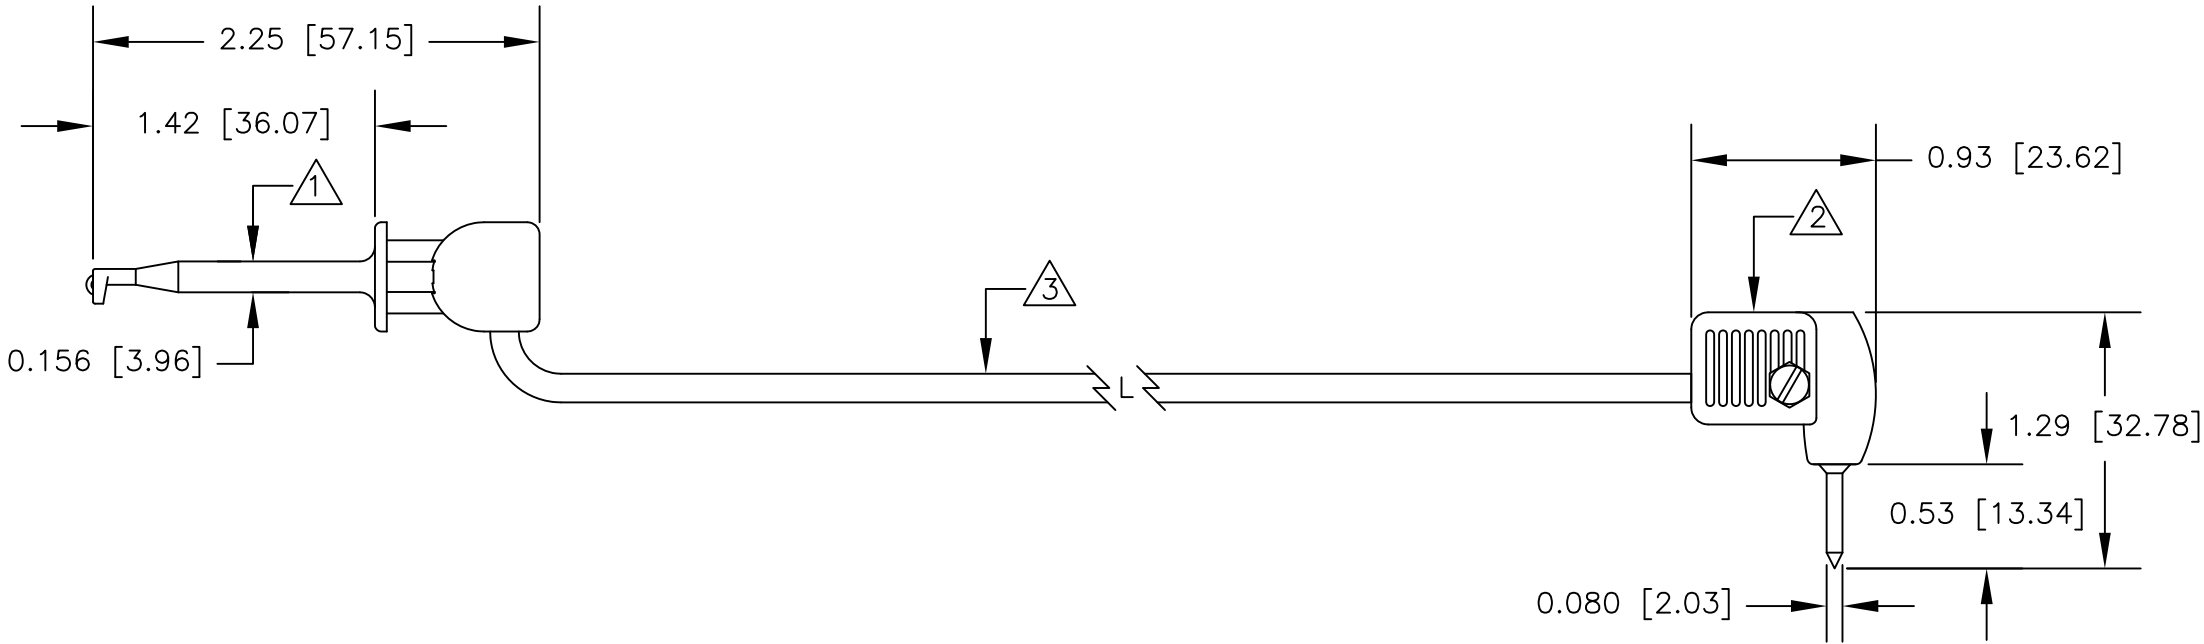

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<div><div>E-Z-HOOK!</div><div>DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.</div></div>				
				APPROVALS	DATE	DESCRIPTION MINI-HOOK (XR) TO METER PIN PLUG (9207)			
				DRAWN	R.L.				
		MATERIAL SEE NOTE.	APPROVED BY						
		FINISH SEE NOTE.							
NEXT ASSY	USED ON					SIZE	CODE IDENT NO.	DRAWING NO.	REV.
						B	08505	606XR	
APPLICATION		DO NOT SCALE DRAWING				SCALE		1:1	SHEET 1 OF 1