


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XJLCOLOR
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
CONTACT BLADE: NICKEL SILVER
SPRING & NEEDLE: STAINLESS STEEL
2. P/N: 9250COLOR
HOUSING: MOLDED ACETAL. AVAILABLE IN BLACK OR RED.
CONTACT: NICKEL PLATED BRASS
3. P/N: W-600/COLOR
18AWG TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN ALL TEN COLORS
4. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
HANDS FREE: 5000 W.V.D.C
MAXIMUM TEMPERATURE: 200°F (93°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

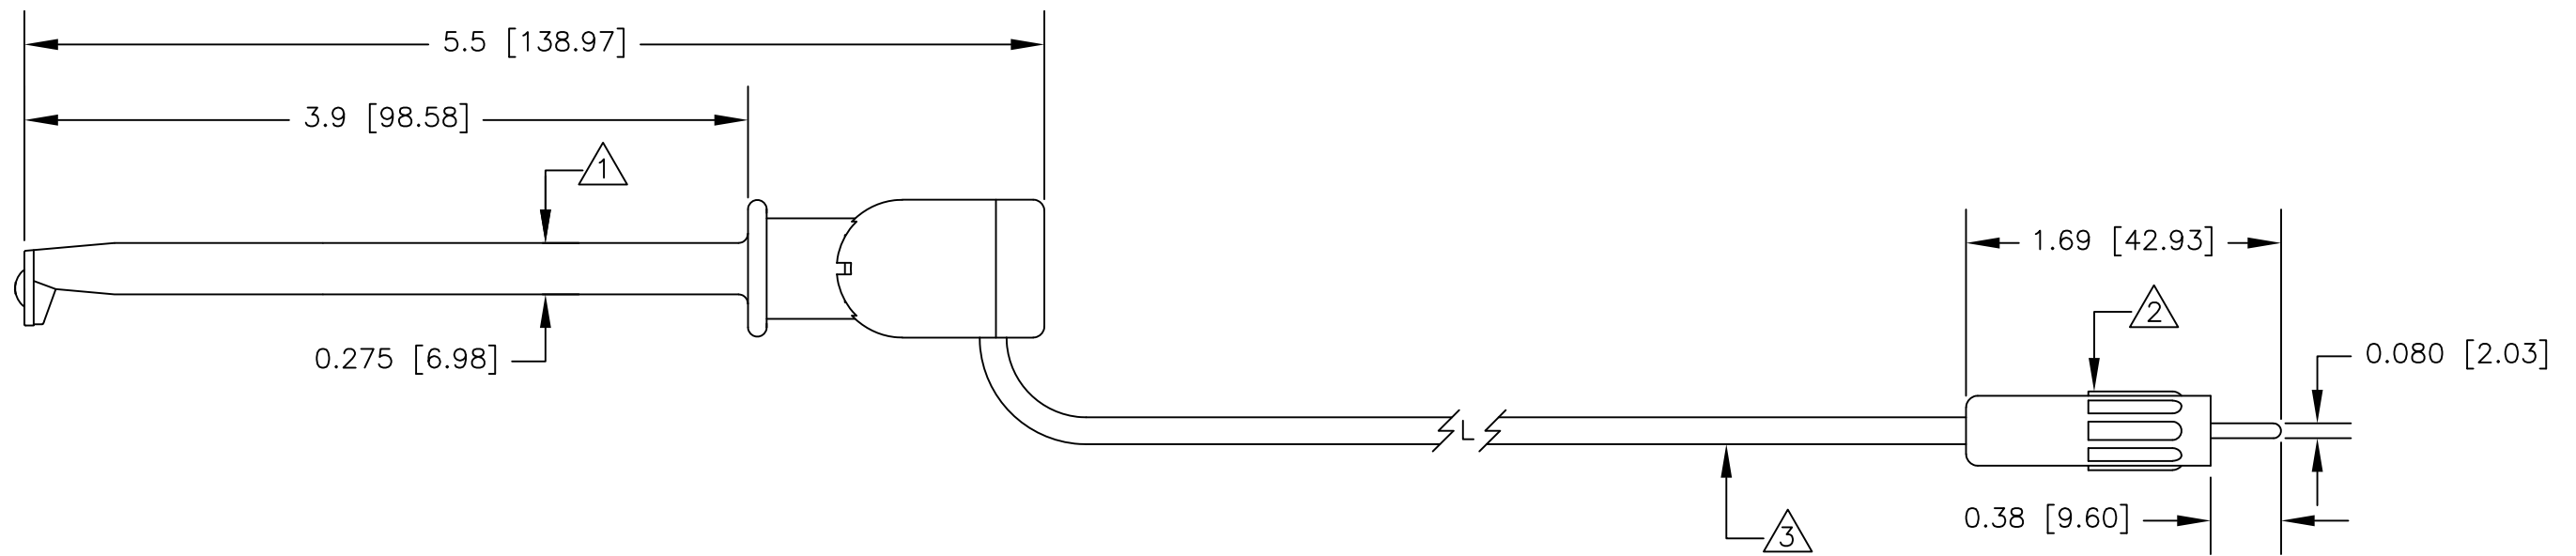

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L	4/19	
			FINISH SEE NOTE.	APPROVED BY		
NEXT ASSY	USED ON				DESCRIPTION XJL MACROHOOK TO 9250 STD PIN PLUG	
APPLICATION		DO NOT SCALE DRAWING	SIZE	CODE IDENT NO.	DRAWING NO.	REV.
			B	08505	AXJL	
			SCALE	1:1		SHEET 1 OF 1