NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XL1COLOR
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
CONTACT BLADE: GOLD PLATED BeCu.
SPRING: STAINLESS STEEL.

2. P/N: 9202COLOR

HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.

FRAME: NICKEL PLATED BRASS.

CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.

3. P/N: W-200/COLOR
22AWG TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.


4. PERFORMANCE

MAXIMUM CURRENT: 2.5 AMPS

MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC

HANDS FREE: 1000 W.V.D.C.

MAXIMUM TEMPERATURE: 200°F (93°C)

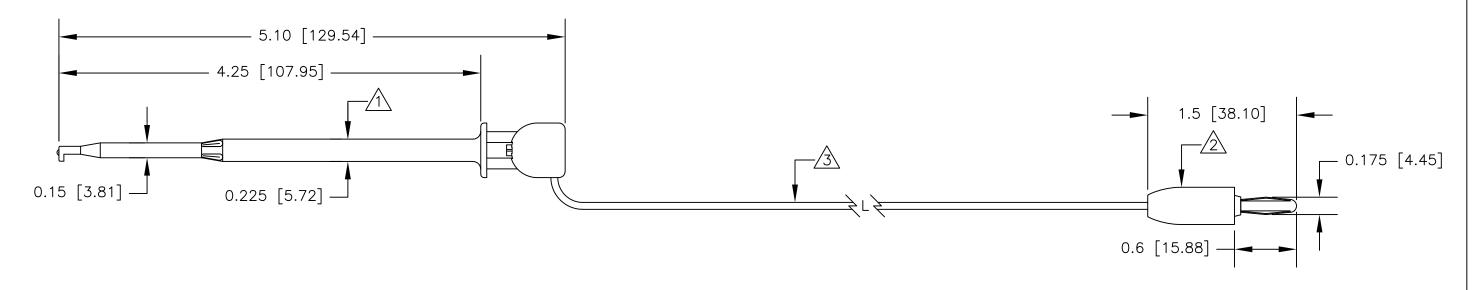

			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES	CONTRACT NO.  APPROVALS DATE		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.				
			± .XXX ± ± .XXX ±	DRAWN R.L.	4/19	DESCH	RIPTION	N 41 N 111 1 0 0		
		MATERIAL SEE NOTE.	APPROVED BY			XL1 MINIHOOK IO				
			JSEE NOTE.				9202	STD BA	N PLUG	
			FINISH			SIZE	CODE IDENT NO.			REV.
	NEXT ASSY	USED ON	-SEE NOTE.			$\mid B \mid$	08505	BXL1		
	APPLICATION		DO NOT SCALE DRAWING			SCALE	1:1		SHEET 1 OF 1	