


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9274COLOR
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.
ALLIGATOR: NICKEL PLATED STEEL.
2. P/N: 9202COLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
FRAME: NICKEL PLATED BRASS.
CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
3. P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
4. PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

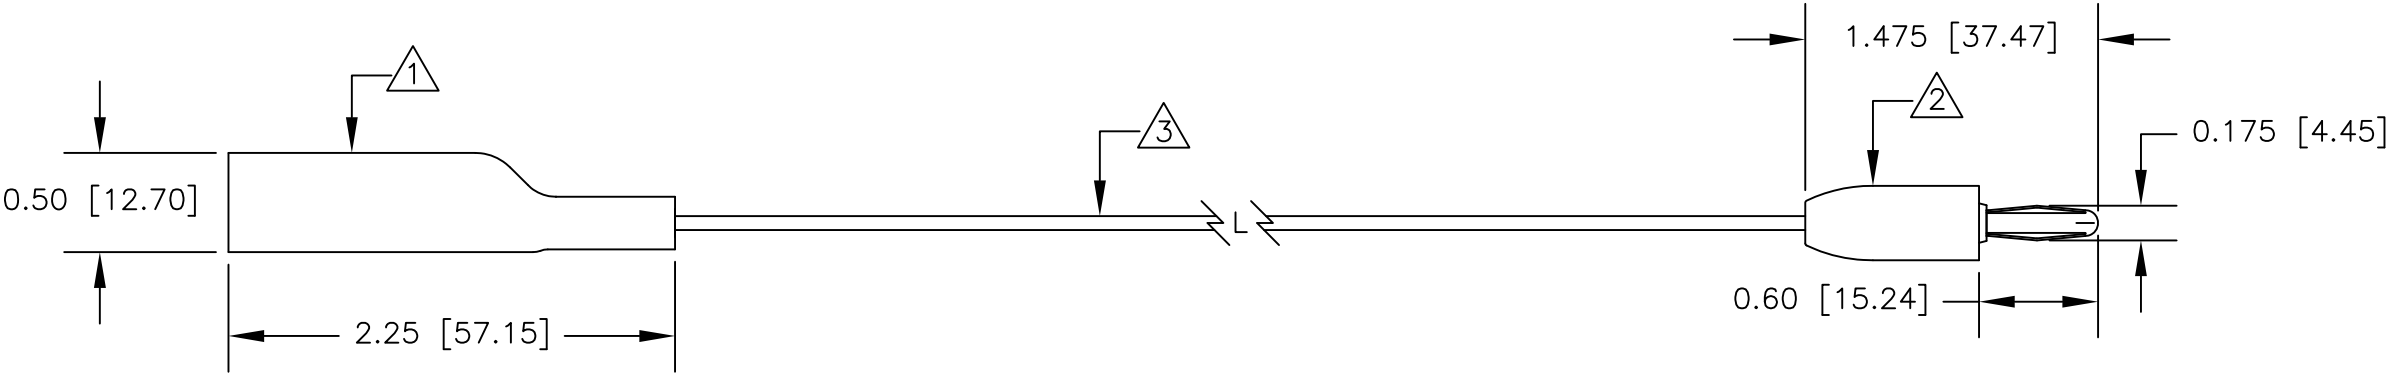

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<div>E-Z-HOOK[®]</div> <div>DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.</div>				
			APPROVALS	DATE	DESCRIPTION STD ALLIGATOR CLIP (9274) TO STD BAN PLUG (9202)				
			DRAWN	R.L. 10/12					
		MATERIAL SEE NOTE.	APPROVED BY		STD ALLIGATOR CLIP (9274) TO STD BAN PLUG (9202)				
		FINISH SEE NOTE.			SIZE	CODE IDENT NO.	DRAWING NO.		REV.
NEXT ASSY	USED ON				B	08505	280		
APPLICATION		DO NOT SCALE DRAWING			SCALE		1:1		SHEET 1 OF 1