


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9275COLOR  
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.  
ALLIGATOR: NICKEL PLATED STEEL.
2. P/N: 9203COLOR  
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.  
FRAME: NICKEL PLATED BRASS.  
CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
3. P/N: W-200/COLOR  
22AWG 65X40 TINNED COPPER  
0.070 [1.78] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.
4. PERFORMANCE  
MAXIMUM CURRENT: 2.5 AMPS  
MAXIMUM VOLTAGE: 1000 W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

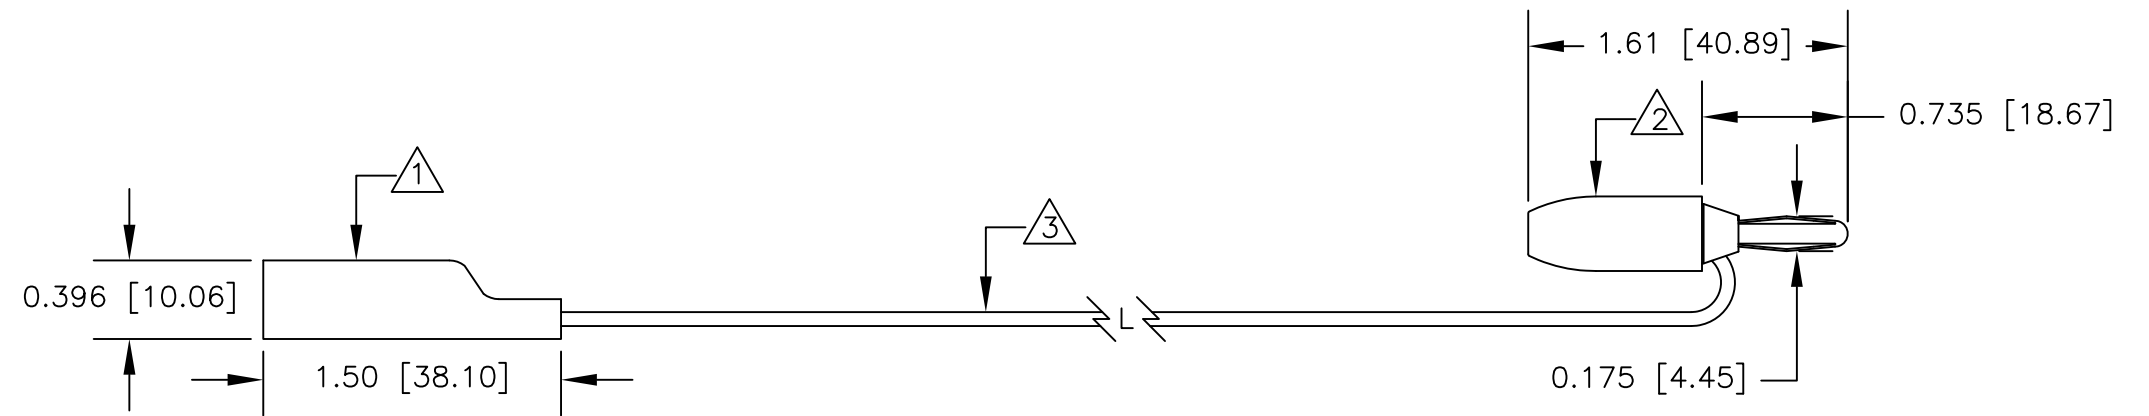

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L. 10/12	DESCRIPTION MINI ALLIGATOR CLIP (9275) TO STD STK BAN PLUG (9203)	
			APPROVED BY			
NEXT ASSY		FINISH SEE NOTE.	SIZE	CODE IDENT NO.	DRAWING NO.	REV.
USED ON			<b>B</b>	<b>08505</b>	281M	
APPLICATION		DO NOT SCALE DRAWING	SCALE	1:1	SHEET 1 OF 1	