NOTES: UNLESS OTHERWISE SPECIFIED


1. P/N: 9274COLOR
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.

2. P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

ALLIGATOR: NICKEL PLATED STEEL.

3. PERFORMANCE

MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

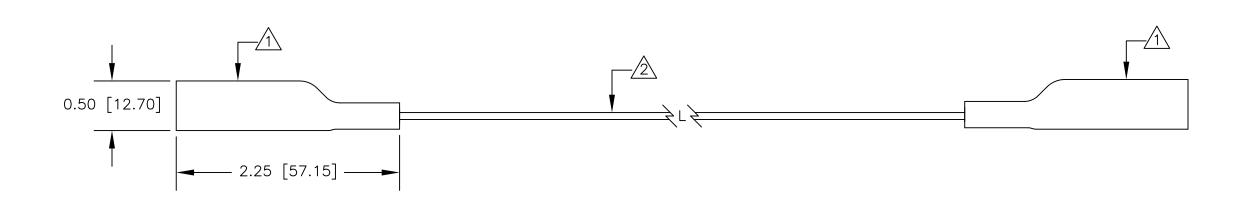

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ± MATERIAL SEE NOTE.	APPROVALS DRAWN R.L. APPROVED BY	DATE 10/12	DESCRI STD	PTION			274)
		FINISH				CODE IDENT NO. I			REV.
NEXT ASSY	USED ON	SEE NOTE.			$ \mathbf{B} $	08505	284		
APPLICATION		DO NOT SCALE DRAWING			SCALE	1:1		SHEET 1 OF	1