


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9275COLOR
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.
ALLIGATOR: NICKEL PLATED STEEL.
2. P/N: 9210COLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
END CAP: MACHINED DELRIN. WHITE.
FRAME: NICKEL PLATED BRASS.
3. P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
4. PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

| REVISIONS | | | |
|-----------|-------------|------|----------|
| LTR | DESCRIPTION | DATE | APPROVED |
| | | | |

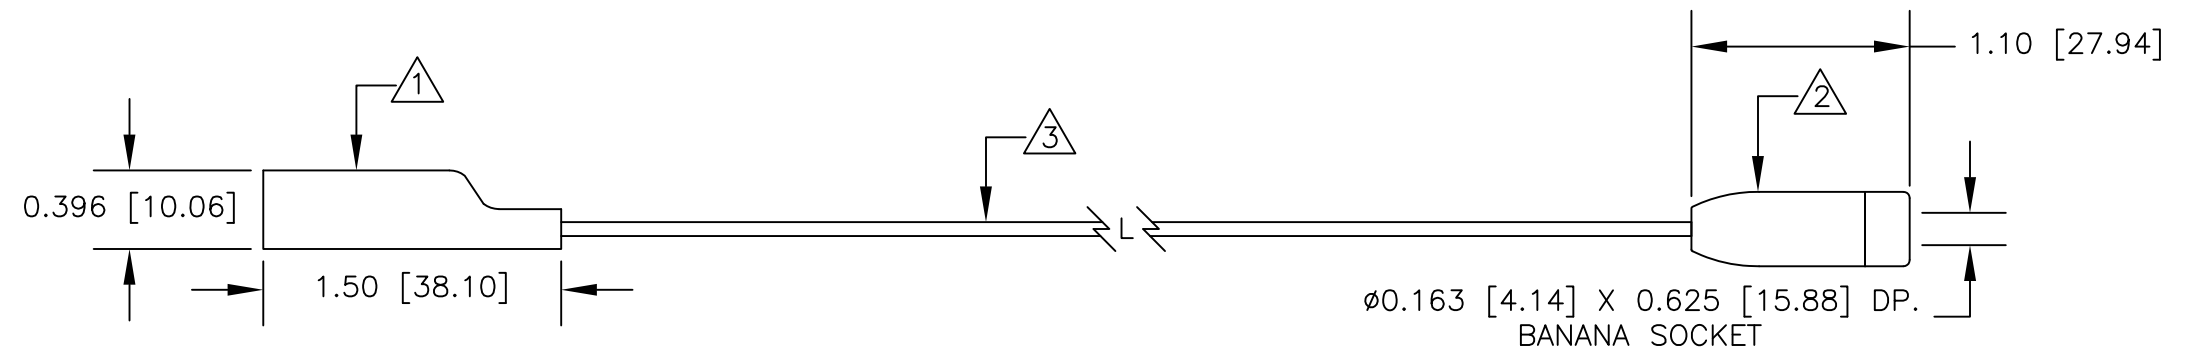

| | | | | | |
|---|---------|----------------------|------------|--|----------------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ± | | CONTRACT NO. | | E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A. | |
| MATERIAL SEE NOTE. | | APPROVALS | DATE | | |
| FINISH SEE NOTE. | | DRAWN | R.L. 10/12 | DESCRIPTION MINI ALLIGATOR CLIP (9275) TO STD BAN SKT (9210) | |
| NEXT ASSY | USED ON | APPROVED BY | | SIZE | CODE IDENT NO. |
| APPLICATION | | DO NOT SCALE DRAWING | | B | 08505 |
| | | | | DRAWING NO. | REV. |
| | | | | 290M | |
| | | | | SCALE | SHEET 1 OF 1 |
| | | | | 1:1 | |