


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XKCOLOR  
HOUSING & PLUNGER: GLASS FILLED CELCON. AVAILABLE IN COLORS.  
CONTACT BLADE: STAINLESS STEEL.  
SPRING: STAINLESS STEEL.
2. P/N: W-300/COLOR  
24AWG 19x36 SILVERED COPPER  
0.044 [1.22] O.D. TEFLON INSULATION  
AVAILABLE IN TEN COLORS.
3. PERFORMANCE  
MAXIMUM CURRENT: 1.8 AMPS  
MAXIMUM VOLTAGE: 600 W.V.D.C.  
MAXIMUM TEMPERATURE: 392°F (200°C)

LTR	DESCRIPTION	DATE	APPROVEI

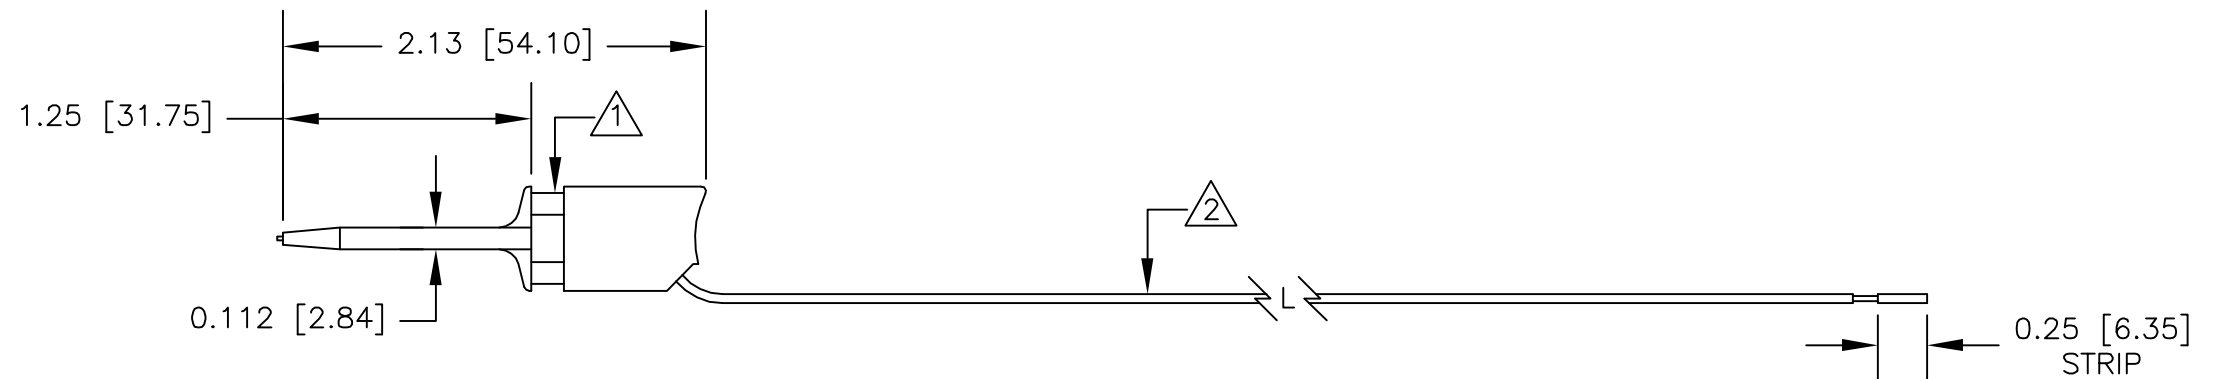

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	S.B.W.	DESCRIPTION MICRO-HOOK (XK) TO LEAD ONLY	
			APPROVED BY			
		FINISH SEE NOTE.	SIZE	CODE IDENT NO.	DRAWING NO.	REV
NEXT ASSY	USED ON			B	08505	313XK
APPLICATION		DO NOT SCALE DRAWING	SCALE	1:1	SHEET 1 OF 1	