


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: 40 PROBE
 HOUSING: NYLON 6,6. AVAILABLE IN BLACK OR RED
 CONTACT: NICKEL PLATED BRASS.
 TUBING: CLEAR ACRYLIC
 ADAPTER : ANODIZED ALUMINUM. AVAILABLE IN BLACK OR RED
- P/N: 9260COLOR
 HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
 FRAME: NICKEL PLATED BRASS.
 CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
- P/N: W-600/COLOR
 18AWG TINNED COPPER
 0.144 [3.66] O.D. PVC INSULATION
 AVAILABLE IN TEN COLORS.
- PERFORMANCE:
 MAXIMUM CURRENT: 4.0 AMPS
 MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
 HANDS FREE: 3500 VRMS
 MAXIMUM TEMPERATURE: 176°F (80°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

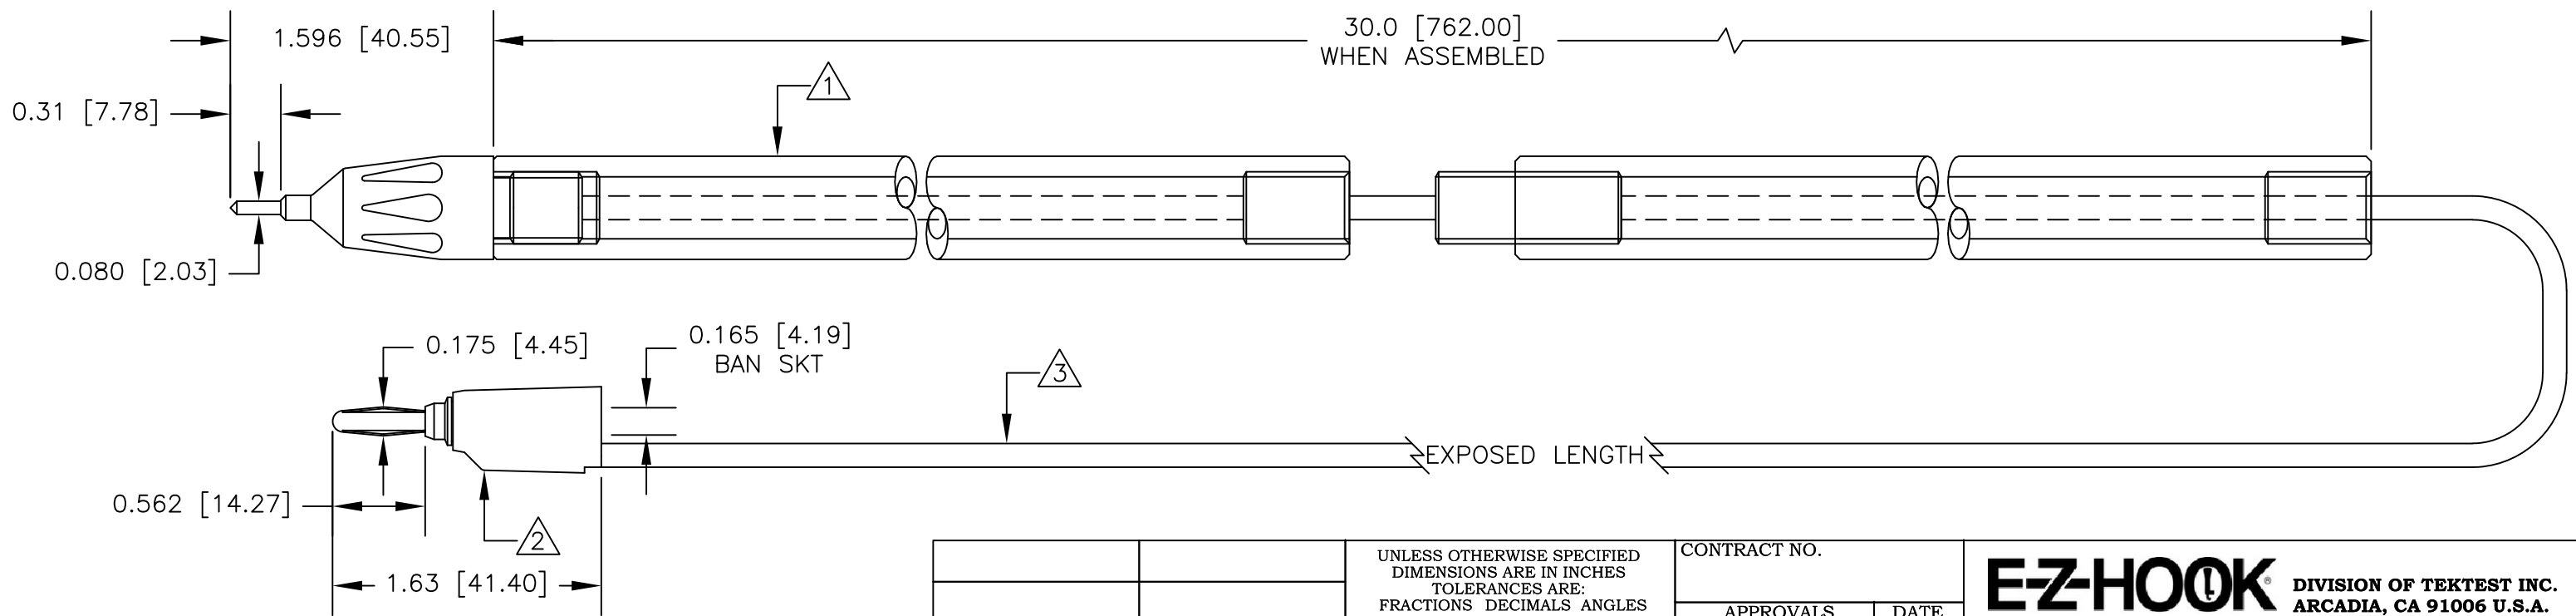

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± N/A .XX ± N/A ± N/A .XXX ± N/A		CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.			
MATERIAL SEE NOTES		APPROVALS	DATE				
FINISH SEE NOTES		DRAWN R.L.	8/18	DESCRIPTION LONG HANDLE PROBE TO STK BAN PLUG (9260)			
NEXT ASSY		APPROVED BY					
APPLICATION		DO NOT SCALE DRAWING		SIZE	CODE IDENT NO.	DRAWING NO.	REV.
				B	08505	60140	
				SCALE	1:1		SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.