


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9208COLOR
HOUSING: MOLDED ACETAL. AVAILABLE IN BLK & RED
TERMINAL: NICKEL PLATED BRASS.
2. P/N: 9260COLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
FRAME: NICKEL PLATED BRASS.
CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
3. P/N: W-600/COLOR
18AWG TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
4. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
HANDS FREE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 176°F (80°C)

LTR	REVISIONS		
	DESCRIPTION	DATE	APPROVED

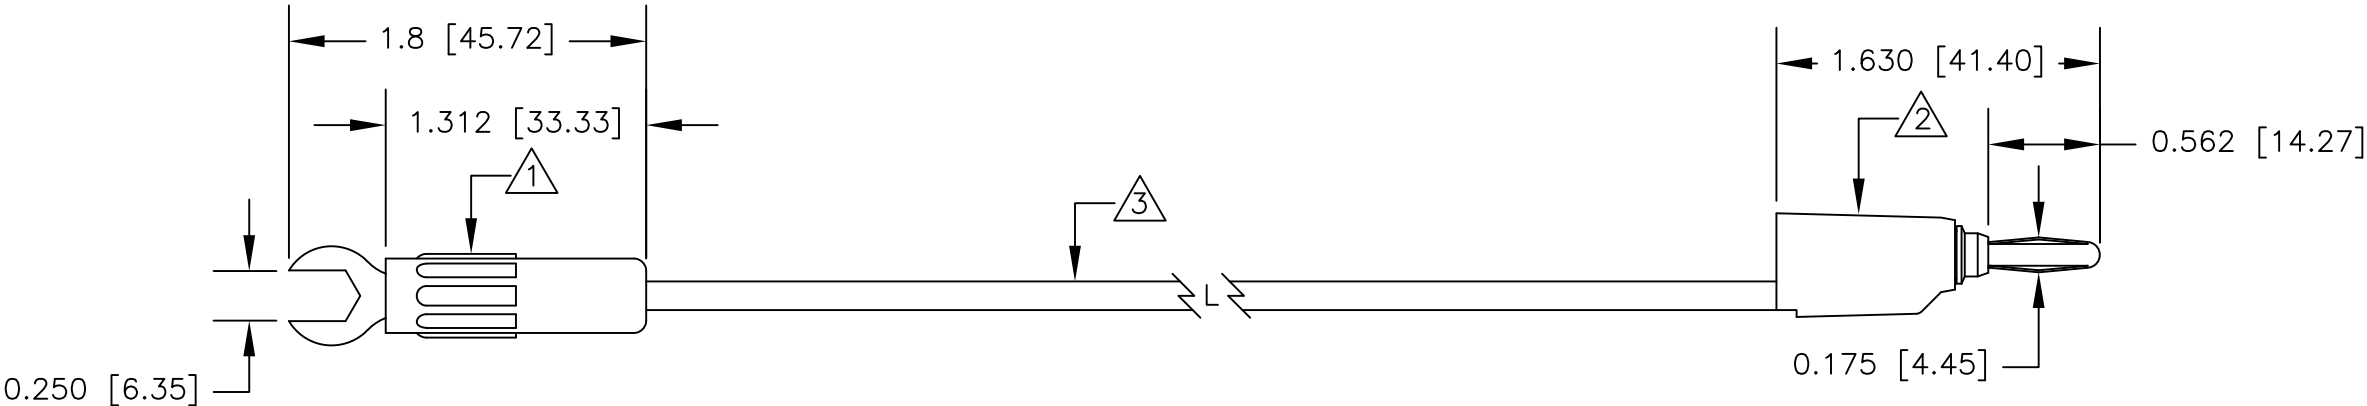

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<div>E-Z-HOOK®</div> <div>DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.</div>			
			APPROVALS	DATE	DESCRIPTION 0.25 [6.35] INSLT SPADE LUG (9208) TO STD STK BAN PLUG (9260)			
			DRAWN	R.L. 11/12				
		MATERIAL SEE NOTE.	APPROVED BY		SIZE	CODE IDENT NO.	DRAWING NO.	REV.
		FINISH SEE NOTE.			B	08505	9142	
NEXT ASSY	USED ON				SCALE	1:1		SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING						