


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 9205-HS  
 INSULATOR: HEAT SHRINK TUBING. BLACK.  
 BODY: NICKEL UNDERPLATED BRASS.  
 CONTACT: GOLD FLASH OVER NICKEL UNDERPLATED BRASS.  
 GOLD FLASH BeCu SPRING.
2. P/N: 9265-HS  
 INSULATOR: HEAT SHRINK TUBING. BLACK.  
 BODY & CONTACT : GOLD PLATED BRASS.
3. P/N: W-200/COLOR  
 22AWG 65X40 TINNED COPPER  
 0.070 [1.78] O.D. PVC INSULATION  
 AVAILABLE IN TEN COLORS.
4. PERFORMANCE  
 MAXIMUM CURRENT: 2.5 AMPS  
 MAXIMUM VOLTAGE: 1000 W.V.D.C.  
 MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

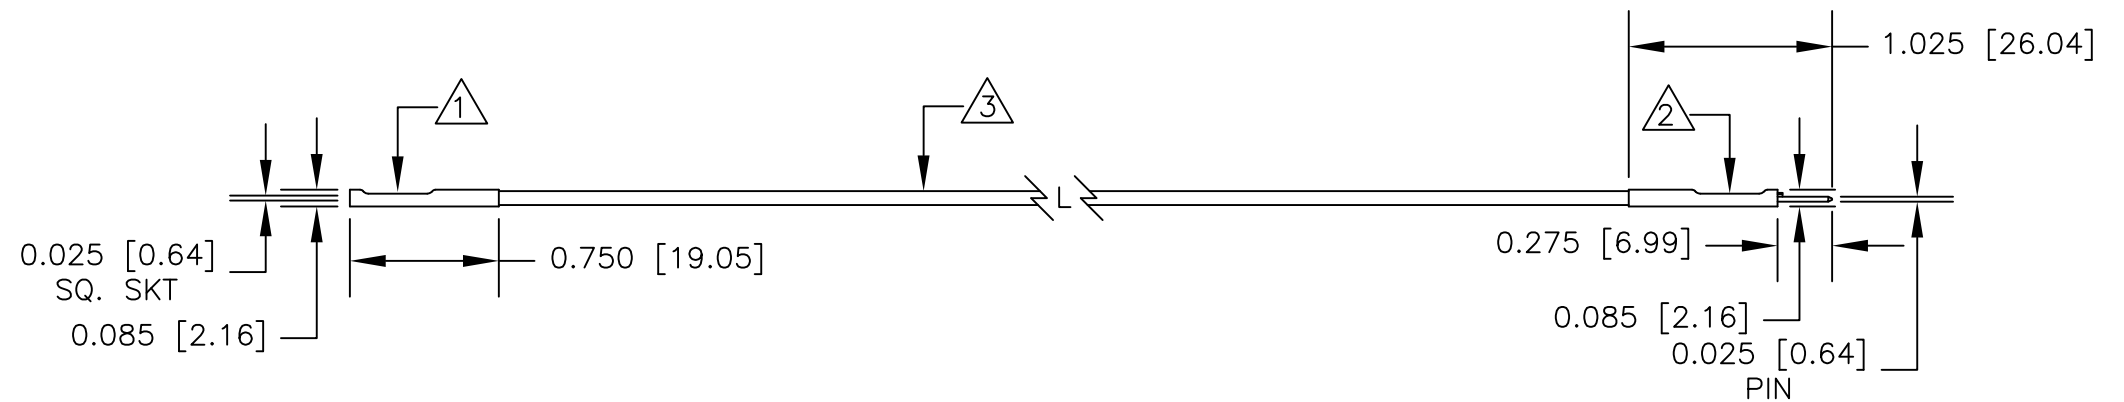

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± N/A .XX ± N/A ± N/A .XXX ± N/A	CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE		
		MATERIAL SEE NOTE.	DRAWN	R.L. 11/16	DESCRIPTION 0.025 [0.64] SQ. SOCKET (9205-HS) TO 0.025 [0.64] PIN PLUG (9265-HS)	
			APPROVED BY			
NEXT ASSY	USED ON	FINISH SEE NOTE.	SIZE	CODE IDENT NO.	DRAWING NO.	REV.
APPLICATION		DO NOT SCALE DRAWING	<b>B</b>	<b>08505</b>	<b>9149</b>	
			SCALE	1:1	SHEET 1 OF 1	