


NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
 HOUSING: POLYPROPYLENE. AVAILABLE IN BLK,
 RED, GRN, YEL, BLU, WTE
 FRAME: NICKEL PLATED BRASS
 CONTACT: NICKEL PLATED BeCu
 WIRE: 18 AWG DOUBLE INSULATED
 0.144 [3.66] O.D. PVC INSULATION
 AVAILABLE IN BLK, RED, GRN, YEL, BLU, WTE
2. PERFORMANCE: IEC 1010
 MAXIMUM CURRENT: 12A
 MAXIMUM VOLTAGE: 600V CAT II
 TEMPERATURE: -68°F (20°C) + 176 (80°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

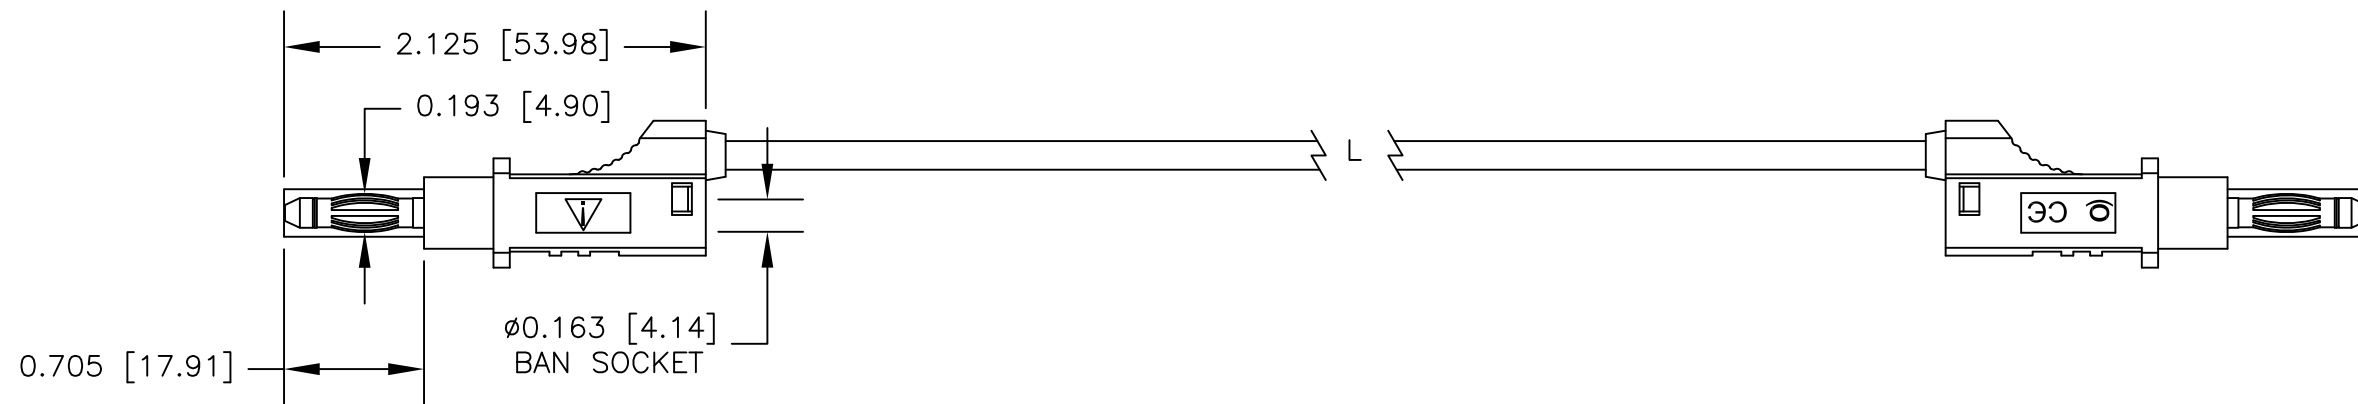

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±		CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.			
MATERIAL SEE NOTE.		APPROVALS	DATE				
FINISH SEE NOTE.		DRAWN	R.L.	3/15	DESCRIPTION RETRACTABLE SHROUDED STK BAN PLUG, JUMPER		
NEXT ASSY	USED ON	APPROVED BY					
APPLICATION		DO NOT SCALE DRAWING		SIZE	CODE IDENT NO.	DRAWING NO.	REV.
				B	08505	9947	
				SCALE	1:1		SHEET 1 OF 1