

E-Z-HOOK®

MANUFACTURER OF EOD TACTICAL SOLUTIONS



WIRE CLAMP DEPLOY LEADS

236XB-7 Deployable Insulation Piercing
XB Wire Clamps with Allen Screw Top
to Stacking Shrouded Right Angle Banana
Plug and Socket connector leads. Pairs
nicely with the XB-Deploy kit.



Allen Thumb Screw used to
loosen & tighten 236XB-7 wire
clamp

Allen Thumb Screws



236XB-7 attaches to Deployable
Extention Tool



XB Deploy Kit




EXTENSION TOOL

Release 236XB-7 Insulation Piercing
Wire Clamps in tight spaces or cut
wire without having to reach the
desired location by hand.



Wire
Cutter
Attachment



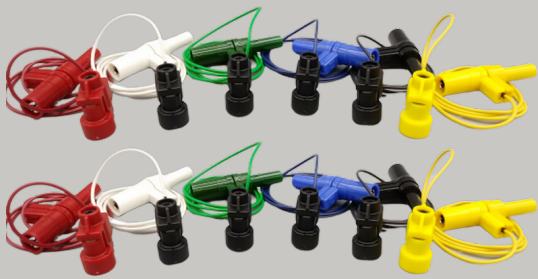

3547 KIT

\$866.40 USD

Kit includes:

12 236XB-7-24 test leads with 2 black, 2 red, 2 yellow, 2 green, 2 blue, 2 white

*The green, blue, and white test leads utilize black XB connectors as shown.



XB-DEPLOY KIT

\$192.32 USD

Kit includes:

- 1 Deployable Extension Tool
- 3 Allen Thumb Screws
- 1 Wire Cutter Attachment
- 1 Zippered Tool Pouch

The 236XB-7-24 test leads are insulation piercing XB wire clamps to a 9306 stacking shrouded right angle banana plug and socket. The 236XB-7 wire clamp accepts 20-28 AWG wire and the 9306 connector accepts shrouded and standard banana plugs and sockets. These test leads are used with the Deployable Extension Tool in the XB-Deploy Kit. The Deployable Extension Tool fastens onto the Allen socket located on the top of the XB wire clamp connector, allowing for deployment in tight spaces. The Allen thumb screws included in the XB-Deploy Kit may also be used to loosen or tighten the XB wire clamps when reach is not an issue. These leads utilize 22 AWG, 24 in (60.96 cm) wire. The 236XB-7-24 are also sold individually at \$72.20 USD each.

The Deployable Extension Tool attaches to the 236XB-7 insulation piercing wire clamp connector or the screw on wire cutter attachment. Both uses allow you to either deploy a test lead or cut wire in tight spaces. The allen thumb screws included are used to loosen or tighten the 236XB-7 wire clamp connectors. Features of the extension tool:

- Made of anodized aluminum, length of 13.25 in (33.655 cm)
- Fully insulated heat shrink shaft provides maximum protection against corrosion and contact with other metals
- Easy to grasp T-handle allows user to engage the allen thumb screw to lock and deploy the wire clamp connector
- Threaded and slotted end of extension tool ensures a secure method of fastening attachments