



NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
 HOUSING & PLUNGER: MOLDED NYLON TYPE. AVAILABLE IN TEN COLORS.
 CONTACT BLADE: NICKEL SILVER ALLOY.
 SPRING: STAINLESS STEEL.

2. PERFORMANCE:
 MAXIMUM CURRENT: 13.1 AMPS WITH A 76° TEMPERATURE RISE.
 MAXIMUM VOLTAGE: 2.4 KV
 MAXIMUM TEMPERATURE: 200°F (93°C)

3. FEATURES:
 HOOK PIERCES LEADS UP TO $\phi 0.140$ [$\phi 3.56$].
 FIELD SERVICEABLE.

LTR	DESCRIPTION	REVISIONS		DATE	APPROVED
		NO.	DESCRIPTION		

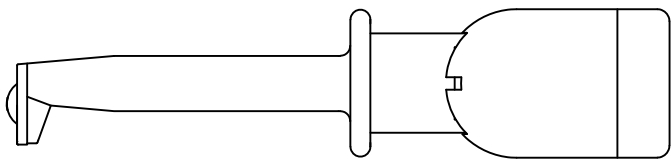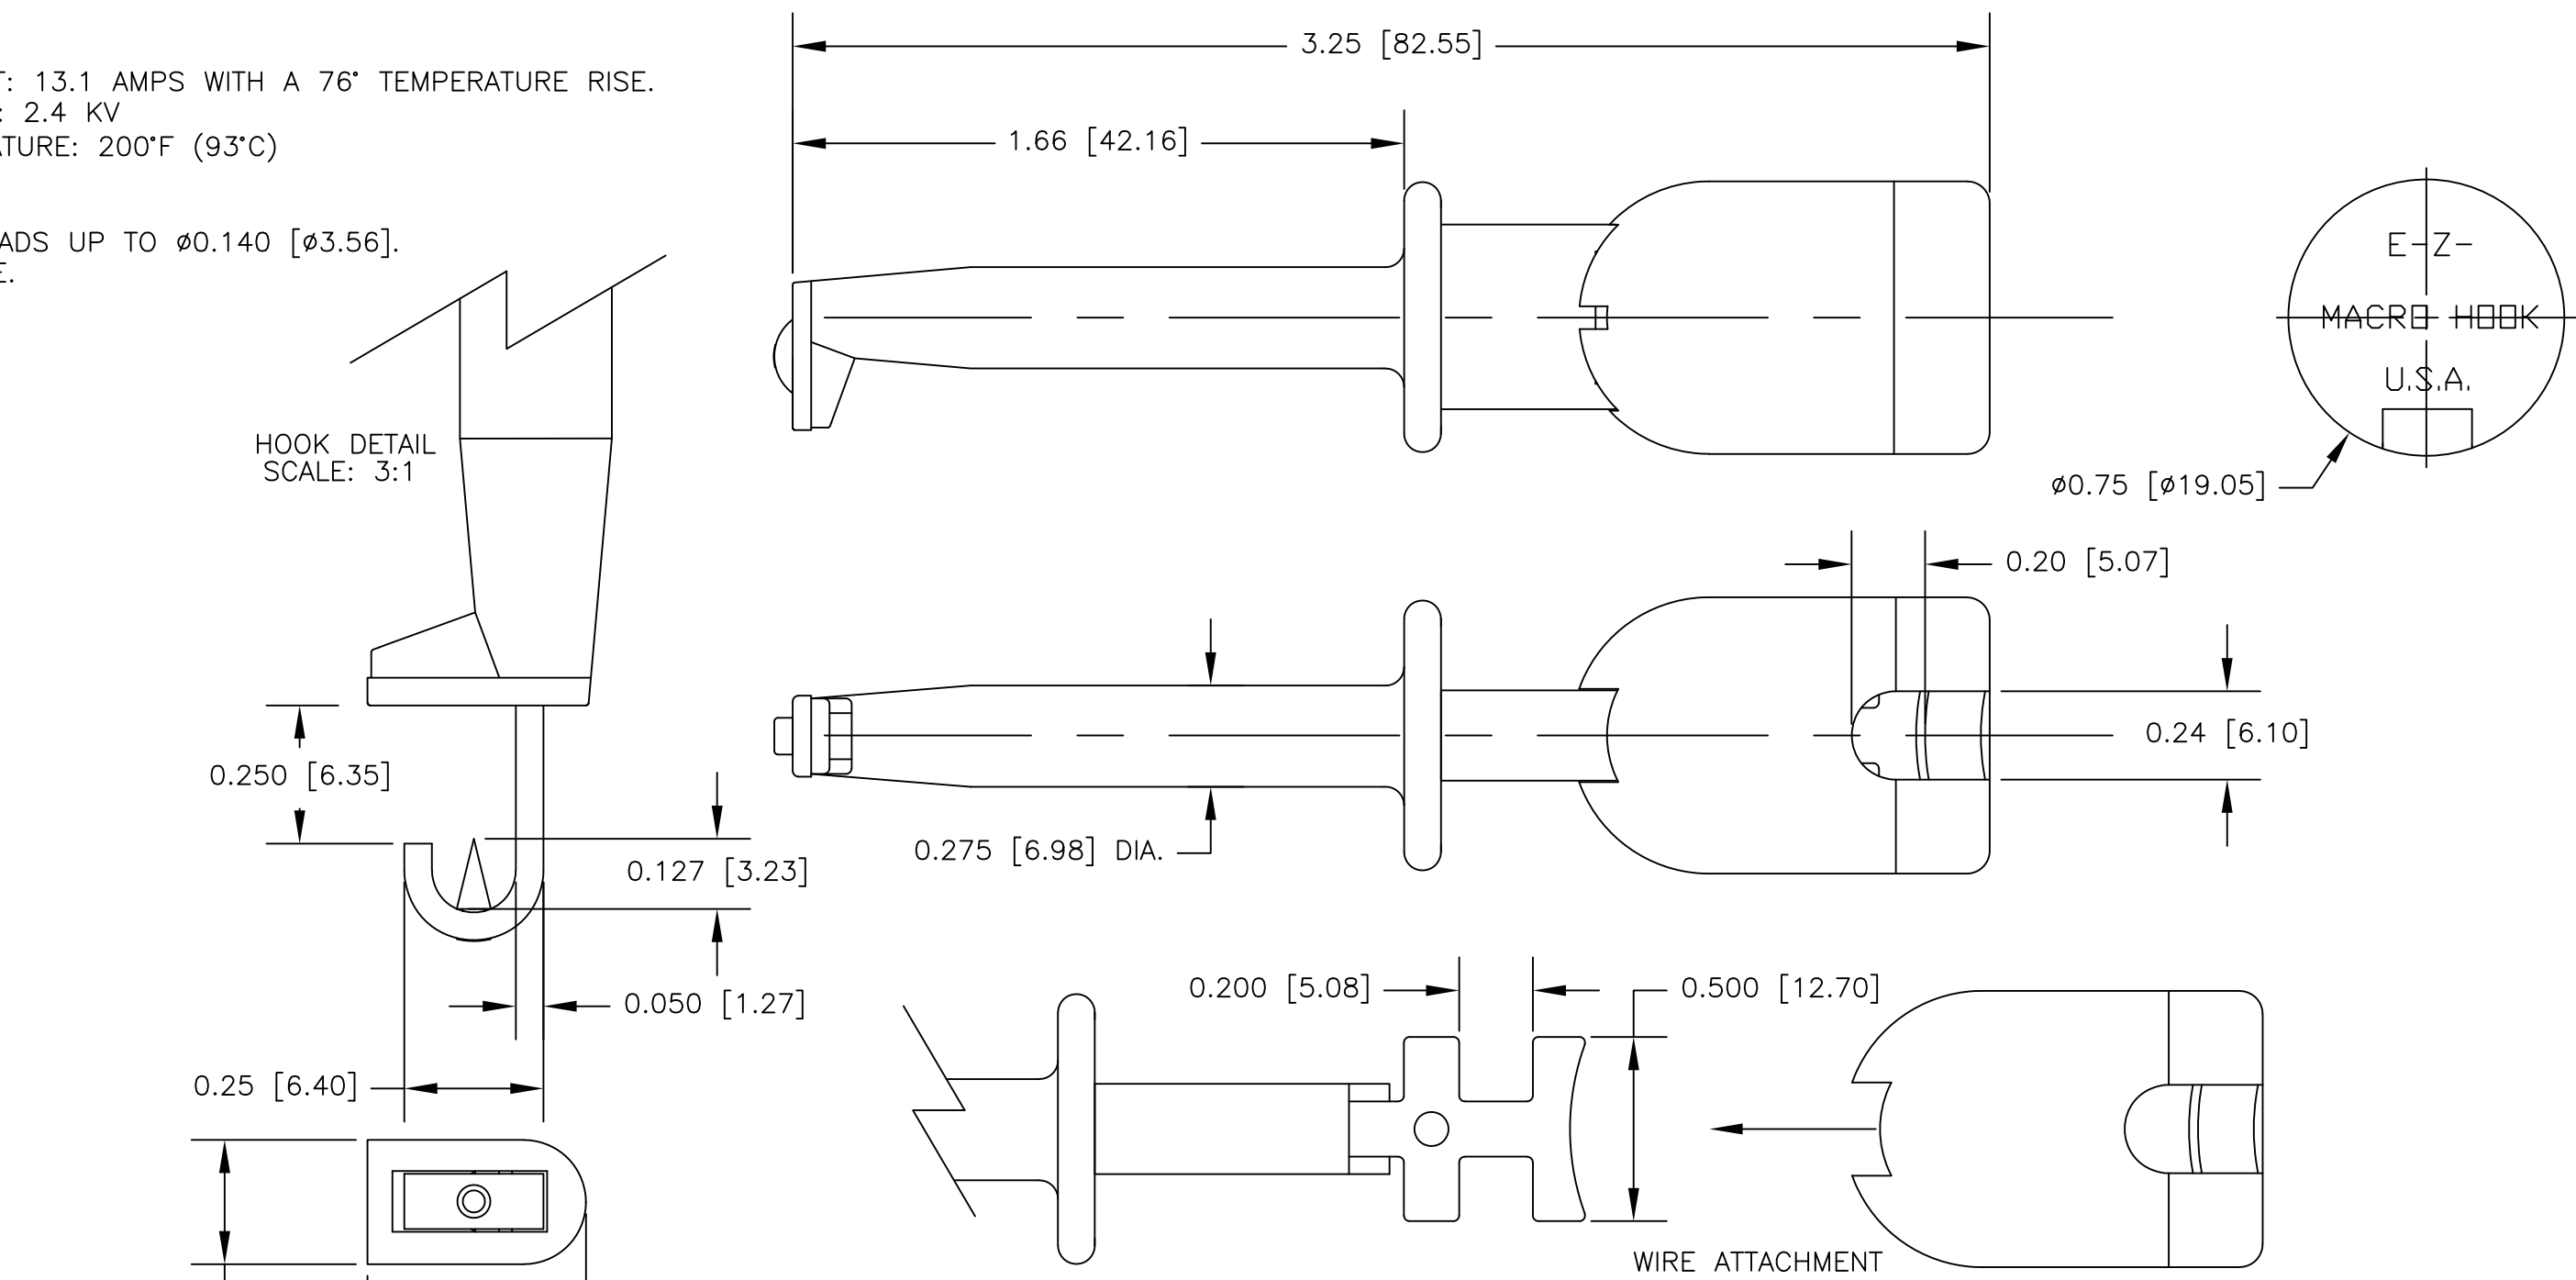

ACTUAL SIZE

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±		CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.			
MATERIAL SEE NOTE.		APPROVALS	DATE				
FINISH SEE NOTE.		DRAWN R.L.	6/09	DESCRIPTION E-Z-MACRO HOOK INSULATION-PIERCING			
		APPROVED BY		SIZE	CODE IDENT NO.	DRAWING NO.	REV.
NEXT ASSY	USED ON			B	08505	XJ	
APPLICATION		DO NOT SCALE DRAWING		SCALE	2:1		SHEET 1 OF 1