REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XRCOLOR
   HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6. AVAILABLE IN TEN COLORS.
   CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.00001 [0.000254] THICK MINIMUM.
   SPRING: STAINLESS STEEL TYPE 302.

2. P/N: W-600/COLOR
   18AWG 65X36 TINNED COPPER
   0.144 [3.66] O.D. PVC INSULATION
   AVAILABLE IN TEN COLORS.

3. PERFORMANCE
   MAXIMUM CURRENT: 4.0 AMPS
   MAXIMUM VOLTAGE: 5000 W.V.D.C.
   MAXIMUM TEMPERATURE: 221°F (105°C)

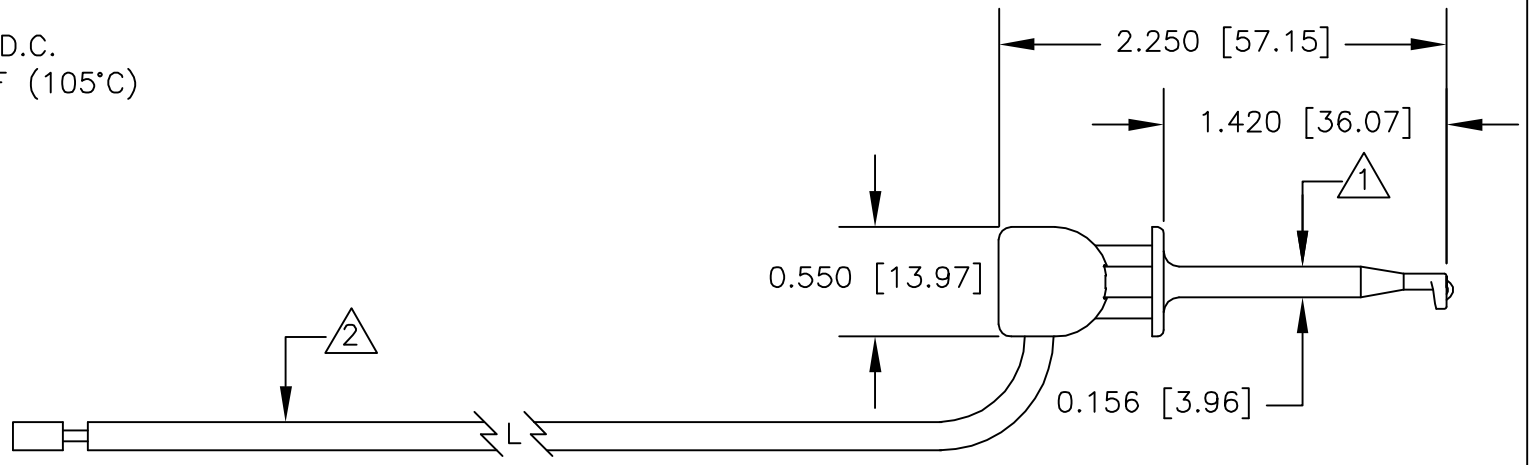

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS ± DECIMALS .XX ± .XXX ± ANGLES ±	CONTRACT NO.	E-Z-HOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
			APPROVALS	DATE	
			DRAWN R.L.	10/10	DESCRIPTION: MINI-HOOK (XR) TO LEAD ONLY
		MATERIAL: SEE NOTE.	APPROVED BY		
		FINISH: SEE NOTE.			SIZE: A; CODE IDENT NO.: 08505; DRAWING NO.: 613XR; REV.
NEXT ASSY	USED ON				
APPLICATION		DO NOT SCALE DRAWING			SCALE: 1:1; SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC.
MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.