


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: 0148/0 & P/N: 0201
 INSULATOR: HEAT SHRINK TUBING 221. BLACK.
 BODY: BRASS. 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.
 CONTACT: BeCu OR PHOSPHOR BRONZE. 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.
- P/N: W-701/COLOR
 28AWG 19X40 TINNED COPPER
 0.047 [1.19] O.D. PVC INSULATION
 AVAILABLE IN TEN COLORS.
- PERFORMANCE
 MAXIMUM CURRENT: 1.0 AMPS
 MAXIMUM VOLTAGE: 600 W.V.D.C.
 MAXIMUM TEMPERATURE: 221°F (105°C)

| | | REVISIONS | |
|-----|-------------|-----------|----------|
| LTR | DESCRIPTION | DATE | APPROVED |
| | | | |

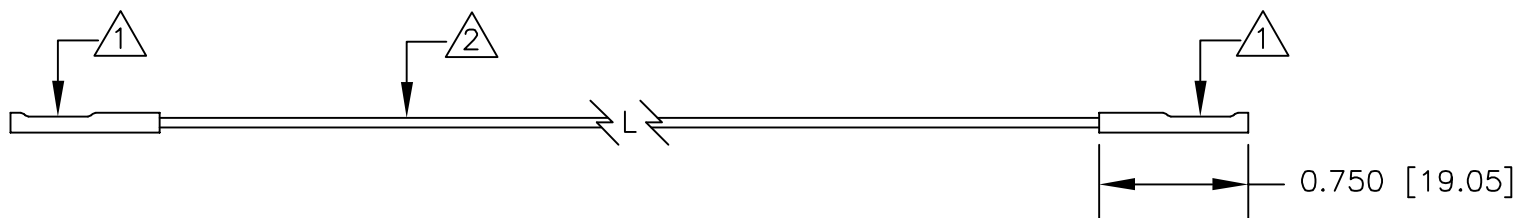

| | | | | | | | | |
|-------------|---------|---|--------------|-------|--|----------------|--------------|------|
| | | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ± | CONTRACT NO. | | E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A. | | | |
| | | | APPROVALS | DATE | | | | |
| | | MATERIAL SEE NOTE. | DRAWN | R.L. | DESCRIPTION 0.025 [0.64] SQ. SOCKET JUMPER | | | |
| | | | APPROVED BY | 10/10 | | | | |
| | | FINISH SEE NOTE. | | | SIZE | CODE IDENT NO. | DRAWING NO. | REV. |
| NEXT ASSY | USED ON | | | | A | 08505 | 9120 | |
| APPLICATION | | DO NOT SCALE DRAWING | | SCALE | | 1:1 | SHEET 1 OF 1 | |