


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XELCOLOR
 HOUSING & PLUNGER & SLIDE: MOLDED NYLON. AVAILABLE IN TEN COLORS.
 CONTACT NEEDLE & SPRING: STAINLESS STEEL.
 BANANA SOCKET: BRASS
 SET SCREW: ALLOY STEEL
2. P/N: 9214COLOR
 HOUSING: MOLDED ACETAL. AVAILABLE IN BLACK OR RED.
 FRAME: NICKEL PLATED BRASS
 CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE.
3. P/N: W-600/COLOR
 18AWG TINNED COPPER
 0.144 [3.66] O.D. PVC INSULATION
 AVAILABLE IN TEN COLORS.
4. PERFORMANCE
 MAXIMUM CURRENT: 4.0 AMPS
 MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
 HANDS FREE: 5000 W.V.D.C.
 MAXIMUM TEMPERATURE: 176°F (80°C)

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

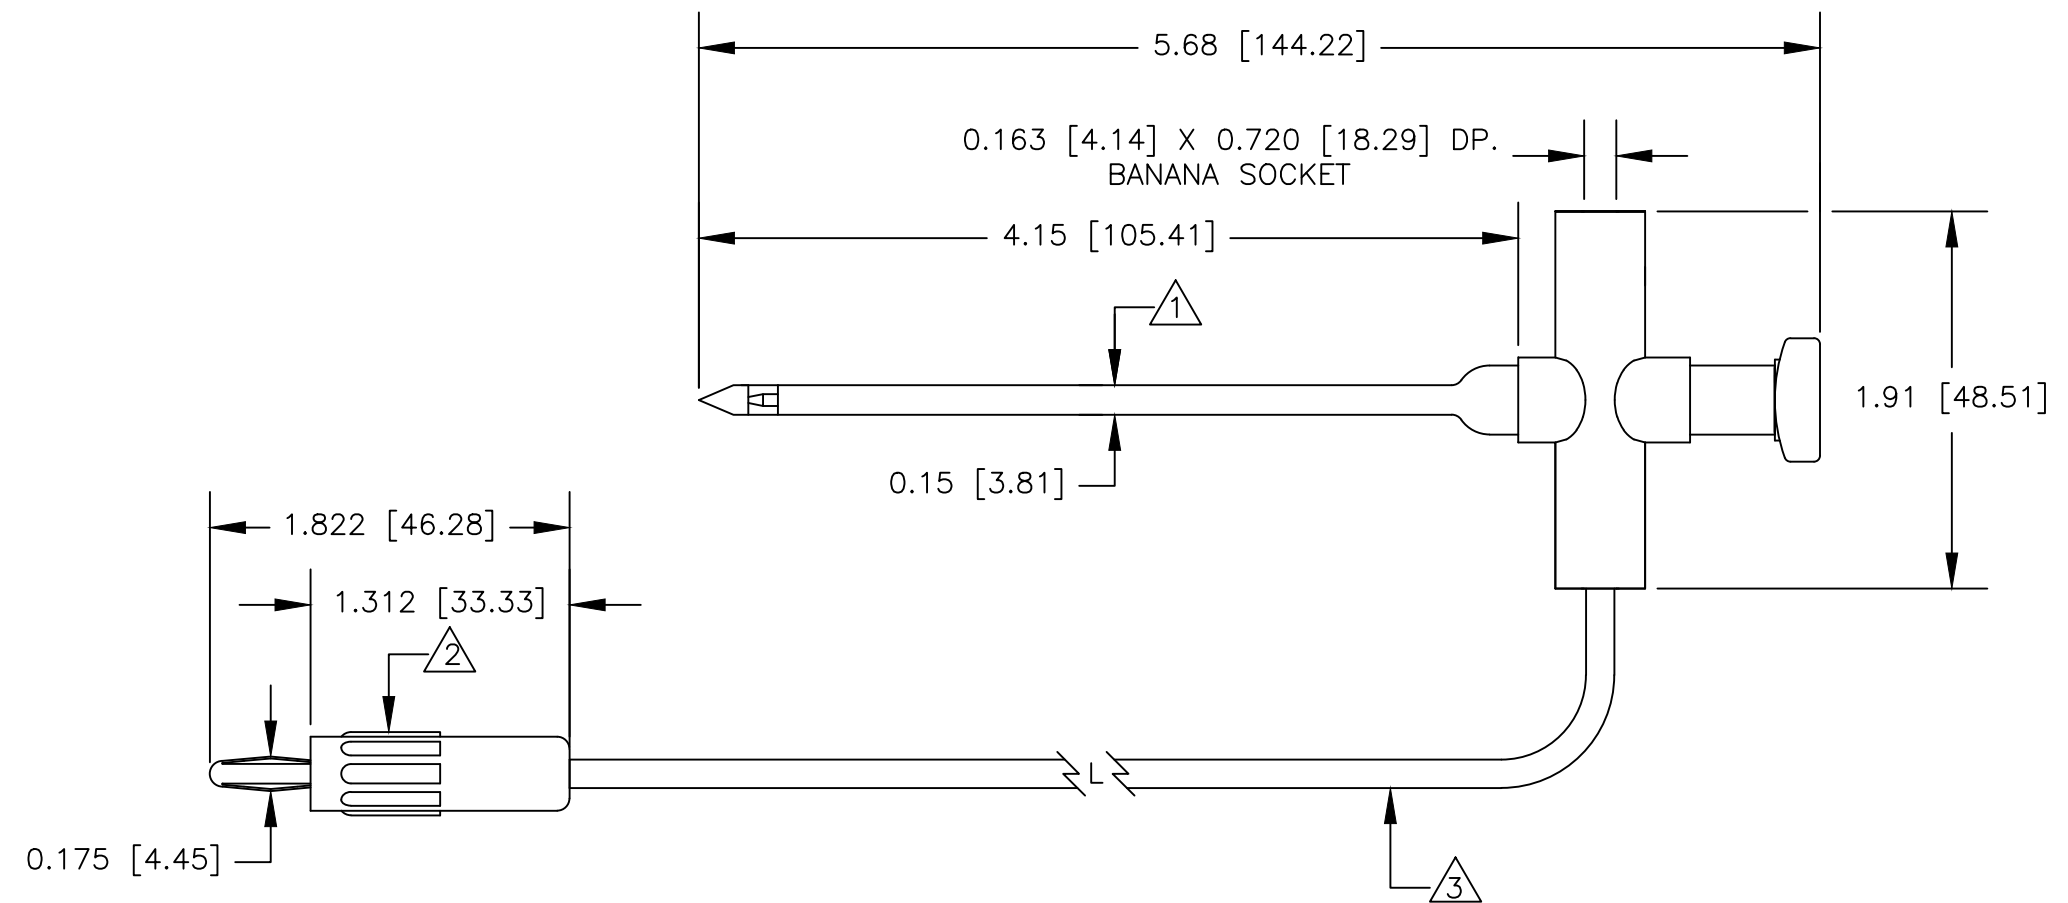

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±		CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.			
		MATERIAL SEE NOTE.		APPROVALS DATE DRAWN R.L 8/16					
		FINISH SEE NOTE.		APPROVED BY		DESCRIPTION INSULATION PIERCING MACRO-HOOK (XEL) TO STD BANANA PLUG (9214)			
NEXT ASSY	USED ON					SIZE	CODE IDENT NO.	DRAWING NO.	REV.
						B	08505	BXEL	
APPLICATION		DO NOT SCALE DRAWING				SCALE 1:1		SHEET 1 OF 1	